HOUSING

Dimensions	Length	Width	Height	Cutout
Standard Housing	18-1/8"	18"	13-3/8"	6-3/8"
Chicago Plenum	18-1/8"	18"	13-3/8"	

Dimensions	Length	Width	Height	Cutout
Standard Housing	18-1/8"	18"	9"	6-3/8"
Chicago Plenum	18-1/8"	18"	9"	

6" Directional
PAR20/30/30L
PAR38/3

PAR lamp directional with lockable 35° tilt and 365° rotation. Center beam optics provide full output with no flashback. HA6S and HA6S3 shallow plenum versions allow use where vertical clearance is limited. Housings have a top access feature for lamp replacement above the ceiling.

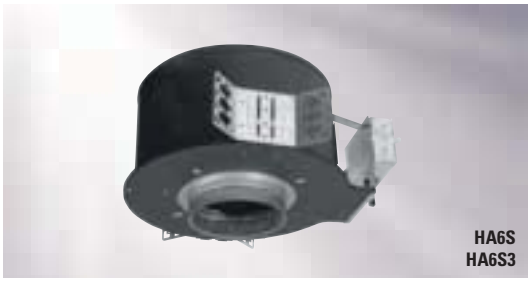

HOUSING
HA6=Directional, PAR30L, PAR38
HA6CP=6" Directional, PAR30L, PAR38, Chicago Plenum

HA6S=Directional, PAR20, PAR30, Shallow Plenum
HA6SCP=Directional, PAR20, PAR30, Shallow Chicago Plenum

HA6S3=Directional, PAR38 Side Prong, Shallow Plenum
HA6S3CP=Directional, PAR38 Side Prong, Shallow Chicago Plenum

OPTIONS
DR*=DeRated Wattage Label, Specify Wattage

ACCESSORIES
H277=Step Down Transformer, 300VA Max
HB26=C Channel Bar Hanger, 26" Long, Pair
HB50=C Channel Bar Hanger, 50" Long, Pair
RMB22=Wood Joist Bar Hanger, 22" Long, Pair
FK5=Field Installed Fuse Kit, 5 Amp
L200 Series=Optical Lenses for PAR Lamps, use with LC30 Lens Clip or LC38 Lens Clip
LC30=Lens Holder for PAR30 Lamps and L200 Series Lens
LC38=Lens Holder for PAR38 Lamps and L200 Series Lens

TRIM









TRIM
6471=Self Flanged
6470=Molded Trim Ring, White

FINISH
LI=Low Iridescent Clear
H=Haze
WMH=Warm Haze
G=Gold
WH=Wheat
B=Black
W=Gloss White
GP=Graphite
GPH=Graphite Haze
K=Cognac
KH=Cognac Haze
BB=Black Baffle (6470 only)
WB=White Baffle (6470 only)

OPTIONS
WF=White Painted Flange (Self Flanged only)

Angle Cut
PAR20 50W Max
PAR30 75W Max
PAR30L 75W Max
PAR38 250W Max
PAR38/3 150W Max

Ordering Example Housing, Trim, Accessories and Lamps ordered as separate line items.	Housing	Trim	Accessories
	HA6S	**6471LI**	**HB26**